




## PL-2NXC11 1080P WDR Network Box Camera

### DIMENSION

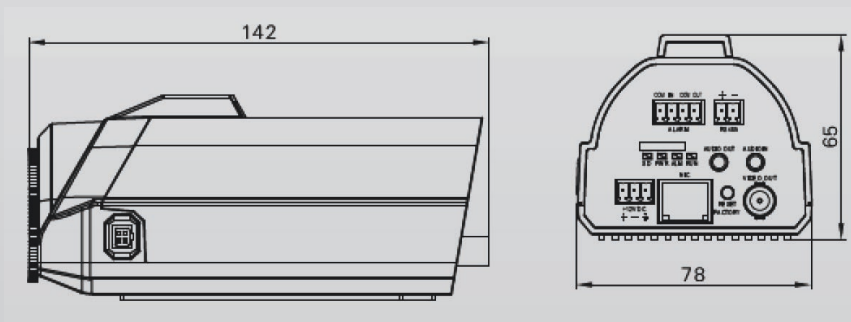

### FEATURES

- 1/2.8" Progressive Scan CMOS
- 1080P Resolution
- Triple Streams, Triple Power Supply
- Low bitrate ,Excellent low light performance
- WDR,3D DNR
- 2 Ch Audio in,1 Ch Audio out
- ROI,Defog,HLC,Corridor mode,DIS
- Built-in SD/SDHC/SDXC slot



ITEM	PL-2NXC11
<b>CAMERA</b>	
Image Sensor	1/2.8" Progressive Scan CMOS
Min. Illumination	Color 0.1Lux ; B&W 0.01Lux
Day & Night	ICR
Shutter Speed	1/5-1/20000
Auto Iris	Yes
Wide Dynamic Range	WDR>120dB
Digital Noise Reduction	2D/3D
Lens	N/A
FOV	N/A
IR LED	N/A
IR Range	N/A
<b>IMAGE</b>	
Video Compression	H.264/265, MJPEG
Bit Rate (CBR/VBR)	G.711 ,RAW_PCM
Max.Resolution	1920*1080/30fps
Stream	Stream1 1920x1080/1280x960/1280x720 Stream 2 D1 to QVGA
Image Setting	Rotate Mode,Saturation,Brightness,Contrast,Sharpness
HLC	Yes
9:16 Corridor Mode	Yes
Focal length	Yes
DIS	Auto
ROI	Yes
Defog	Yes
<b>NETWORK</b>	
Network Protocols:	HTTP,HTTPS, TCP/IP, UDP/IP, RTSP, DHCP, NTP, PPPoE, Unicast and Multicast supported.
Alarm Trigger	Motion Detection,Line Crossing,Tamper, Area Intrusion, Camera Move,Dwell,Multiple Dwell,Retrograde Detection,Object Left,Object Remove, Abnormal Speed,Illegal Parking,Network disconnect,Disk alarm,I/O alarm
RTSP Video	Standard RFC2326, Support QuickTime / VLC Player.
Security	User security authentication, Reset, Hardware WatchDog
Web Language	English, Chinese,Polish,Italian,Portuguese,Spanish.(Sunell Brand)
System Compatibility	Onvif,CGI
<b>INTERFACE</b>	
Ethernet	1 Ethernet (10/100 Base-T) RJ-45 Connector
Audio I/O	2ch Audio In,1ch Audio Out
Alarm I/O	1ch Alarm In,1ch Alarm Out
RS485	Yes
BNC Output	Yes
Reset Button	Yes
Edge Storage	Micro SD/SDHC/SDXC slot ,Max 128GB
<b>GENERAL</b>	
Power Supply	AC24V/DC12V/POE
Power Consumption	3W(MAX)
Operating Temperature	Starting Temperature: -10°C ~ 50°C (14°F ~ 122°F ), Working Temperature: -20°C ~ 50°C (-4°F ~ 122°F)
Operating Humidity	0% - 90% RH
Ingress Protection	N/A
Approvals	CE / FCC
Product Dimensions	142mm(D)x78mm(W)x65mm(H)
Product Weight	390g

(\*) Must use regulated & specified power supply.